

KUBALIK

High airflow rate and silent reversible extractor with automatic back draught shutter for window or wall installation

Extractor reversible de gran caudal y silencioso con persiana automática antirretorno para ventana o pared



automatic back draught shutter
persiana automática antirretorno



MANUFACTURING FEATURES

- Reversible, high-flow rate and silent extractor with automatic non-return back draught shutter to prevent the entry of unwanted or contaminant air. It can be installed in a window or wall. Being reversible you can choose if you want to provide air in a room or remove it. KUBALIK extractors are carefully designed to provide low environmental impact, using recyclable materials.
- Housing and impeller made of UV-resistant ABS plastic (prevents aging caused by exposure to sunlight). The internal components are made of impact resistant PS. Self-lubricated bushings motor protected against thermal overload.
- Easy and fast installation thanks to its innovative design.
- Maximum working temperature in continuous: 50°C.
- IPX4 protection. IMQ Safety certificate to guarantee the electromechanical compatibility.

APPLICATIONS

- Applicable to domestic spaces such as kitchens, dining rooms, laundry rooms, bathrooms, etc. But also, in commercial environments such as shops, bars, cafes, gyms, restaurants, offices, schools, etc.
- Designed to be installed in any type of window and wall.

CARACTERÍSTICAS CONSTRUCTIVAS


- Extractor reversible de gran caudal y silencioso con persiana automática antirretorno para evitar la entrada de aire no deseado o contaminante instalable en ventana o en pared. Al ser reversible puede escoger si desea aportar aire en una sala o extraerlo. Los extractores KUBALIK están cuidadosamente diseñados para proporcionar un bajo impacto ambiental, utilizando materiales reciclables.
- Carcasa y hélice de plástico ABS resistente a los rayos UV (evita el envejecimiento causado por la exposición a la luz solar). Los componentes internos están fabricados en PS resistente a impactos. Motor de rodamientos de fricción auto lubricados protegido contra la sobrecarga térmica.
- Fácil y rápida instalación gracias a su novedoso diseño.
- Temperatura máxima de trabajo en continuo: 50°C.
- Protección IPX4. Certificado IMQ Safety para garantizar la compatibilidad electromagnética.

APLICACIONES

- Aplicable a espacios domésticos como cocinas, comedores, lavaderos, baños, etc. Pero también en entornos comerciales como tiendas, bares, cafeterías, gimnasios, restaurantes, oficinas, escuelas, etc.
- Diseñado para ser instalado en cualquier tipo de ventana y pared.

Code	Model	Voltage (V)	Rated R.P.M		Rated I (A) 230V	Rat. Power W	Air flow m³/h		Pressure (Pa)	Sound dB (A) 3mm	W. Kg	Connect. diagrams
			Extraction	Supply			Extraction	Supply				
KUB150	KUBALIK 150	220-240	1340	2040	0,11	25	235	150	24	37,5	2,07	1
KUB230	KUBALIK 230	220-240	790	1080	0,13	26	480	310	20	35,6	3,45	1
KUB300	KUBALIK 300	220-240	840	1085	0,21	45	1050	700	28	40,2	6,13	1

DIMENSIONS / dimensiones

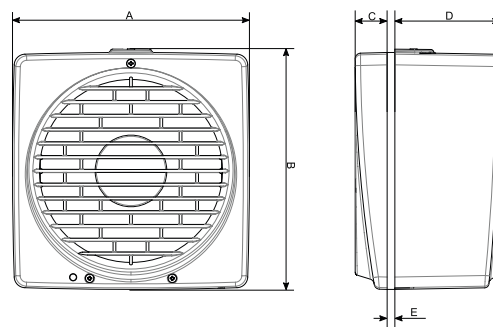


MODEL	A	B	C	D	E	Ø Wall hole
KUBALIK 150	215	218	31	97,5	2/38	185/190
KUBALIK 230	294	297	31	130	2/38	257/262
KUBALIK 300	390	393	31	147	2/38	324/329


CONNECTION DIAGRAMS / esquema de conexiones

1

EXTRACTION / EXTRACCIÓN



SUPPLY / APORTACIÓN



- ① Terminal block
Bornes
- ② 2 pole switch
Interruptor bipolar

CHARACTERISTIC CURVES / curvas características

